

0761, 0762, 0763, 0764, 0768 **EPDM Membrane With Gasket**

Technical Data Sheet

Version 01.01.01 Updated 06.10.23

Product Description

OBEX CORTEX EPDM Membrane With Gasket is used to create a water and airtight seal around windows, doors, and curtain walling on non-relevant buildings.

This membrane is manufactured with a gasket on one edge which enables the membrane to be securely attached directly into the channel of the window frame, or into the OBEX CORTEX Gasket Carrier.

There are 5 different gaskets available which suit most widely used profile systems.

Product Specifications

Widths	50mm - 1500mm
Length	20m per roll

Product Applications

- » Water and airtight seals around windows, doors, and curtain-walling systems.
- » Water and airtight seals from sheathing board to concrete frame.
- » Top of parapet walls.
- » EPDM is not suitable for use on Relevant Buildings taller than 18m as specified in Reg 7. A fire-classified membrane is required - please speak to one of our advisors for further advice.

Technical Data (Membrane)

Harmonised Standard	EN 13984	
3rd Party Certification	BBA	Certificate No. 17/5396
Fire Classification	EN 13501-1	E
Water Tightness	EN 1928	Pass - 2kPa for 24 hours
Air Tightness	EN12114	< 0.1m³ net leakage
Tensile Strength (both directions)	EN 12311-2	≥ 7 MPa
Resistance to tearing (nail shank)	EN 12310-2	≥ 10 N
Water Vapour Permeability	EN 1931	50,000 mu
Equivalent Air Layer Thickness (Sd Value)	EN 1931	37.5m
Vapour Resistance	EN 1931	300 MNs/g
Elongation at break (both directions)	EN 12311-2	≥ 300%
Vapour Resistivity	EN 1931	50,000 MNs/gm
Durability Against Ageing	EN 1296/EN 1931	Pass
Service Temperature (approx)	-45°C to 130°C	






0761, 0762, 0763, 0764, 0768 **EPDM Membrane With Gasket**

TDS

Technical Data Sheet

Version 01.01.01 Updated 06.10.23

Gasket Technical Data

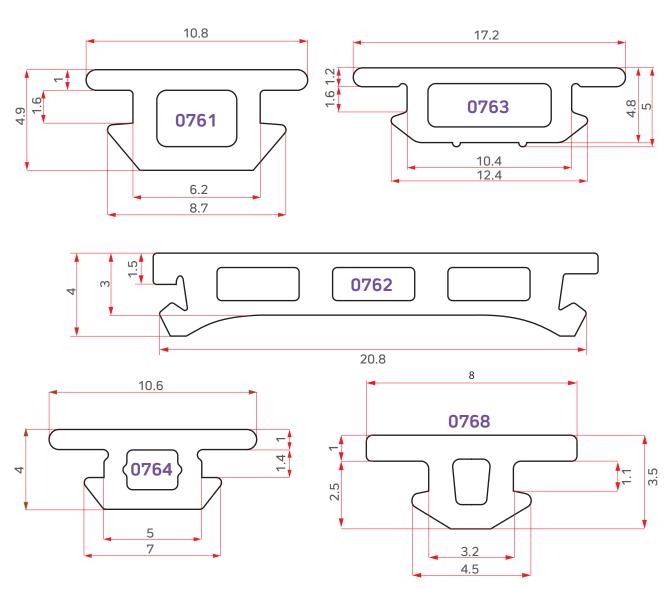

All dimensions are in millimetres





0761, 0762, 0763, 0764, 0768 **EPDM Membrane With Gasket**

Technical Data Sheet

Version 01.01.01 Updated 06.10.23

Thickness

0.75mm

Associated Products

- » OBEX CORTEX 1.5mm EPDM Membrane
- » OBEX CORTEX 1.2mm EPDM Membrane
- » OBEX CORTEX 1mm EPDM Membrane
- » OBEX CORTEX 0.75mm EPDM Membrane
- » OBEX CORTEX 0.6mm EPDM Membrane
- » OBEX CORTEX 0.5mm EPDM Membrane
- » OBEX CORTEX 0769 Paste Adhesive
- » OBEX CORTEX 0765 Paste Adhesive
- » OBEX CORTEX 0785 Primer
- » OBEX CORTEX 0786 Spray Primer
- » OBEX CORTEX 0860 Adhesive Backed EPDM Membrane
- » OBEX CORTEX 0751, 0752, 0753 EPDM Membrane with Butyl Strips

Additional Important Information

- » All edges, joints and overlaps must be capped off with OBEX CORTEX 0769 Paste Adhesive.
- » Porous surfaces and sheathing boards must be primed with OBEX CORTEX 0785 Primer.
- » It is the responsibility of the user to carry out compatibility checks.
- » Consult the OBEX Technical Team with any queries.

Installation Guide



Scan the QR code for the Installation Guide, to ensure an accurate and compliant install.

Alternatively follow this link: obexuk.qrd.by/EPDM-Gasket-loctall

